


BLACKMAGIC AUDIO MADI UPGRADE




Fairlight Audio MADI Upgrade adds three coax MADI input and output connections to the single MADI on the Fairlight Accelerator card. That gives you a total of four MADI inputs and four MADI outputs for 256 inputs and outputs each at 24 bit / 48kHz!

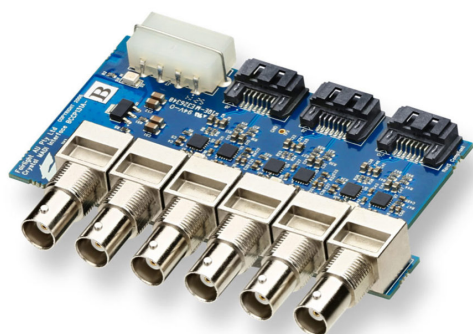


Cena:

Kategorie: [Video](#), [Broadcast](#), [Encodowanie i Streaming](#)



GALLERY IMAGES



OPIS

Connections

MADI Inputs

3 x MADI inputs via 75 ohm BNCs

MADI Outputs

3 x MADI outputs via 75 ohm BNCs

Audio Channels

Total of 192 inputs and outputs

Bit Depth and Sample Rate

24 bit / 48kHz

PCI Form Factor

Single half length PCIe x4 board

Power

4-pin computer power cable connector.

Hardware Requirements

Requires Fairlight Audio Accelerator.

PCIe Requirements

Connection to Fairlight Audio Accelerator using three SATA cables.

Fairlight Audio MADI Upgrade board requires no additional PCIe bandwidth.

Power

Power Usage

4W

Operating Systems

Mac 10.15 Catalina or later.

Windows 10, 64-bit.

Physical Specifications

Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Fairlight Audio MADI Upgrade

3 x 30cm SATA cables.

1 x computer power cable.

Warranty

1 Year Limited Manufacturer's Warranty.