

HYPERDECK EXTREME CONTROL




HyperDeck Extreme Control adds traditional broadcast deck controls to HyperDeck Extreme 8K. It works like a traditional broadcast deck with a familiar layout. Control up to 8 decks via industry standard RS-422 control.



Cena:

Kategorie: [Video](#), [Produkcja](#), [Rejestratory Video](#), [Broadcast](#), [Rejestratory Video](#)

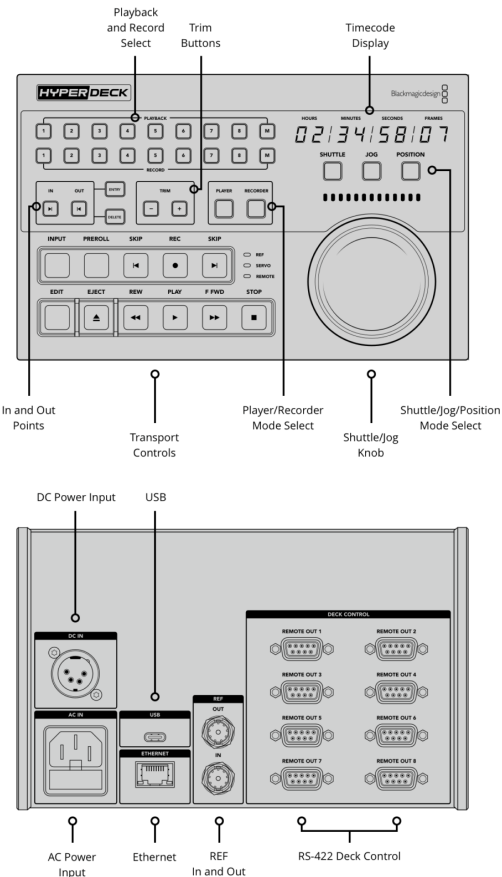

GALLERY IMAGES



OPIS

Connections

Deck Control Outputs

8 x RS-422

Reference Input

Tri-Sync or Black Burst.

Reference Output

Follows reference input.

Ethernet

1Gb/s

Computer Interface

1 x USB-C for software updates.

Supported Protocols

Control Protocols

Sony

Software

Internal Software Upgrade

Loaded at system start,
or via Blackmagic HyperDeck Setup using USB port.

Operating Systems

Mac 10.14 Mojave,
Mac 10.15 Catalina or later.
Windows 8.1 and 10.

Displays

8 digit, 7 segment LED timecode display.

Power Requirements

Power Supply

1 x Internal 100 - 240V AC.
1 x 4 pin XLR 12V DC IN for external power or battery use.

Physical Installation

3 rack units height, half rack width.

Physical Specifications

Environmental Specifications

Operating Temperature:

0° to 40° C (32°to 104° F)

Storage Temperature:

-20° to 60° C (-4° to 113° F)

Relative Humidity:

0% to 90% non-condensing

What's Included

HyperDeck Extreme Control
SD card with user manual.

Warranty

12 Month Limited Manufacturer's Warranty.