

## SCHOEPS CCM 4V




The MK 4V was created in answer to requests for a cardioid with its main axis along the side. In addition to its usefulness in the concert hall, this microphone type is of particular value in speech recording, since its slight emphasis around 10 kHz helps to improve intelligibility.



**Cena:**

**Kategorie:** [Audio](#), [Mikrofony](#)

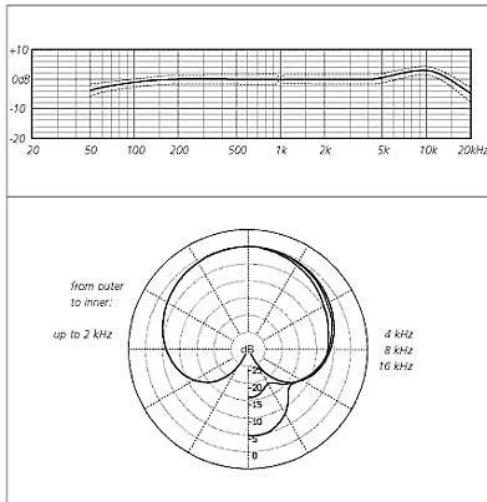

## OPIS

- “vertical” (side-addressed) cardioid capsule
- for a very wide range of recording applications
- slight high-frequency emphasis
- often preferred for singing or speaking voices and most instruments

The directional response is especially well maintained even at higher frequencies, due to the acoustically transparent housing. There is less high-frequency emphasis of off-axis sound than occurs with most small, axial-response cardioids. The MK 4V still sounds somewhat brighter than the MK 4, however, because of its overall frequency response.

### Application

The CCM 4V may be easier to use in near-coincident setups than the CCM 4: the microphone bodies do not get in each other's way.

Although our normal production tolerances are very close, we can deliver specially matched compact microphone pairs for a small extra charge.

**Part No.** XMAC-MS-A xMac mini Server<sup>(1)</sup> **Hardware** Warranty 5-year Dimensions (WxDxH)

19 x 17.75 x 1.72 in. (48.3 x 45.1 x 4.4 cm)

#### Weight

16 lbs (7.26 kg)

#### Form Factor Rackmount External Connectors

- Two Thunderbolt (one open, one used)
- One RJ-45 Gigabit Ethernet port extension
- Three USB 3.0 ports (one front mount and 2 rear mount)
- One HDMI port extension

#### Internal Connectors

- 6-pin Mini-Fit Jr (provides auxiliary power for PCIe cards that require it)
- One C-8 power

#### Expansion Slots

- One x8 (x4 electrical) PCIe 2.0 half-length
- One x16 (x4 electrical) PCIe 2.0 full-length

Compatible PCIe Cards<sup>(4)</sup> Up-to-date PCIe cards listed on our supporting PCIe Card Thunderbolt Compatibility Chart Power Supply

Universal 150W, 90-260V AC, 50-60 Hz

#### Operating Temperature

+32° F to +95° F (0° C to +35° C)

RoHS Compliant Yes

#### Package Contents

- xMac mini Server, assembled
- 0.5-meter Thunderbolt cable
- Daughter card mounting bracket
- Thunderbolt cable
- Thunderbolt cable lock<sup>(4)</sup>



- Power cord
- Documentation

Note: Mac mini and PCIe cards sold separately