

## GPI and Tally Interface



Add tally to your ATEM switcher with Blackmagic Design's GPI and Tally Interface! With 8 contact closure tally outputs, you can send a tally signal to your cameras, replay machines and monitors so everyone knows which camera is 'on-air'! If you need more tally outputs, simply connect multiple GPI and Tally Interfaces together because it connects via Ethernet to your ATEM production switcher.

**\$495**

### Connections

**Contact Closure**

25 pin D-type connector providing 8 opto isolated inputs and 8 relay contact closure outputs.

**Computer Interface**

1 x USB 2.0 high speed interface for configuration and firmware updates.

**Inputs**


Optical isolators triggered by connection to ground. Max 5V at 14mA.

**Outputs**

Mechanical relay contact closure to ground. Max 30V at 1A.

**Ethernet**

10/100 BaseT with loop through for connecting to other ethernet enabled equipment.

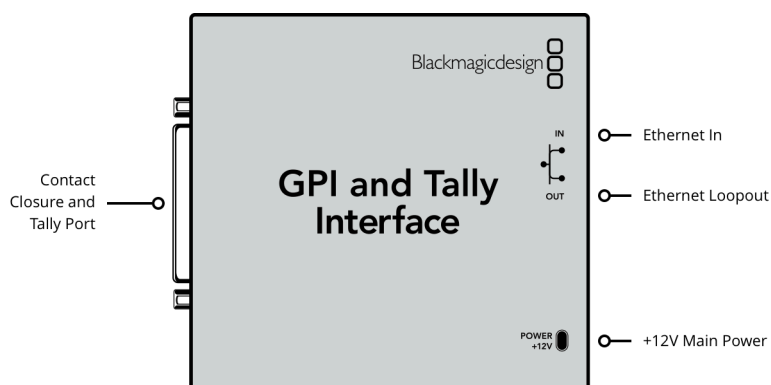

### Software

**Software Included**


Configured via ATEM Switcher Utility.

**Internal Software Upgrade**

Firmware built into software driver. Loaded at system startup or via updater software.

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---


## Power Requirements

### Power Supply

12V power supply included with international socket adaptors for all countries.

---

## Physical Specifications

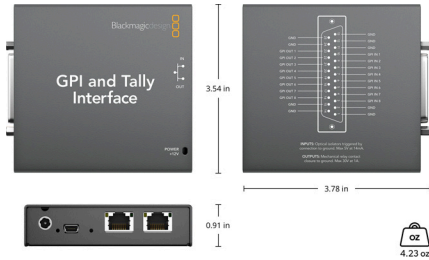

---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20 - 60 degrees celsius

### Relative Humidity

Up to 95%

---

## What's Included

GPI and Tally Interface  
Software CD  
Power Supply

---

## Warranty

12 Months Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller