

# **ATEM Studio Converter**

ATEM Studio Converter is the ideal partner for the ATEM Camera Converter. Connect up to four Camera Converters via optical fiber up to 28 miles away with bi-directional video plus tally and talkback! Connect your ATEM switcher program output to the ATEM Studio Converter and this is distributed to the four Camera Converters. Multiple Studio converters can be cascaded together when more than 4 cameras are needed. \$1,995

# Connections

### SDI Video Input

1 x 10 bit SD/HD switchable program input from switcher, including tally information.

### SDI Video Output

4 x 10 bit SD/HD switchable camera outputs. 1 x 10 bit SD/HD switchable program loop thru output connects to another ATEM Studio Switcher.

### Talkback Audio

Aviation Headsets with 0.25" TRS headset connector and 0.206" TRS microphone connector. Front mounted balanced XLR microphone connector.

# Analog Audio

1 x stereo RCA monitoring output.

## **AES/EBU Audio Input**

1 x combined headphone input. 1 x combined microphone input. Combined inputs for connecting to other ATEM Studio Converters.

### **AES/EBU Audio Output**

1 x combined headphone output. 1 x combined microphone output. Combined outputs for connecting to other ATEM Studio Converters.

# **Balanced XLR Audio Output**

4 x camera stereo analog audio outputs.

# **Optical Fiber Video Input**

4 x single mode SD/HD switchable camera inputs with LC connector.

## **Optical Fiber Video Output**

4 x single mode SD/HD switchable camera outputs with LC connector.

### **Optical Fiber Audio Input**


1 x single mode camera audio inputs with LC connector. Channels 1 & 2 are camera audio. Channels 15 & 16 are intercom audio.

# **Optical Fiber Audio Output**

1 x single mode camera audio outputs with LC connector. Channels 1 & 2 are camera audio. Channels 15 & 16 are intercom audio.

#### **Computer Interface**

1 x mini-B type USB 2.0 connector for firmware updates.

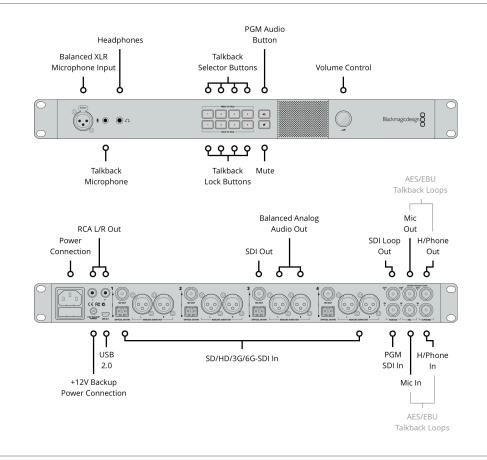

# Standards

#### SD Format Support

525i29.97 NTSC, 625i25 PAL

#### **HD** Format Support

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

#### 2K Format Support

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

# Ultra HD Format Support

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

**4K Format Support** 2160p24

#### SDI Compliance

SMPTE 259M, SMPTE 292M, 296M, 372M, 424M Level B, 425M.

#### **Audio Sampling**

Television standard sample rate of 48Khz, 24 bit A/D conversion.

Video Sampling 4:2:2

**Color Precision** 10-bit

Color Space REC 601, REC 709

Multiple Rate support SDI switches between SD, HD, and UHD.

# Software

# Software Included

Converter Utility for firmware update.

# **Operating Systems**



Mac 10.11 El Capitan, Mac 10.12 Sierra or later.

Windows 8.1 and 10.

# Power Requirements

# **Power Supply**

100 - 240 V AC input with redundant 12 - 31V DC input.

# Physical Specifications



# **Environmental Specifications**

**Operating Temperature** 0° to 40° C (32° to 104° F) **Storage Temperature** -20° to 45° C (-4° to 113° F) **Relative Humidity** 0% to 90% non-condensing

What's Included

ATEM Studio Converter SD card with software and manual

# Warranty

3 Year Limited Manufacturer's Warranty.

Excluding connectors, cables, cooling fans, fiber optic modules, fuses and keyboards which will be free from defects in materials and workmanship for a period of 12 months from the date of purchase.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. <u>Privacy Policy</u>

Blackmagic Design Authorized Reseller