


DeckLink SDI Micro



Miniature M.2 card with 3G-SDI connections for simultaneous capture and playback in all SD and HD formats up to 1080p60. DeckLink SDI Micro also includes Black Burst and Tri-Sync reference input and its miniature size makes it great for use on portable solutions which are based on compact computers!

\$125

Connections

M.2

M.2 PCI Express 1 lane generation 3, compatible with B and M key type 2260 and 2280.

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97, 1080PsF30
1080i50, 1080i59.94, 1080i60

SDI Video Sampling

4:2:2, 4:4:4

SDI Color Precision

8, 10, 12-bit RGB 4:4:4 in all modes up to 1080p30 and 8, 10-bit YUV 4:2:2 in all modes.

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, ITU-R BT.656 and ITU-R BT.601.

Available Accessories

SDI Cable




Part Numbers

DeckLink SDI Micro, order code: BDLKMICROSDI

SDI Cable, order code: CABLE-BDLKMIR/SDI

Physical Specifications

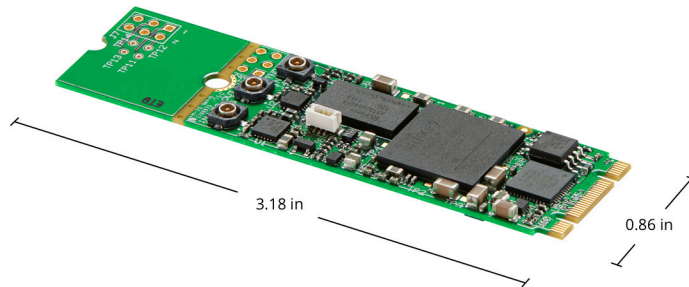

Operating Systems



Windows 8.1 and 10, both 64-bit.



Linux

Power Requirements

Power Consumption

4.03W (max)

Environmental Specifications

Operating Temperature

-25°C to 55°C (-13°F to 131°F)

Storage Temperature

-40°C to 75°C (-40°F to 167°F)

Relative Humidity

0% to 90% non-condensing

What's Included

DeckLink SDI Micro

Fan and Heat Sink assembly

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller