Blackmagic MultiView 4

Blackmagic MultiView 4 is a multi viewer that lets you monitor 4 completely

independent SDI video sources on a single display! Featuring 4 GG-SDI inputs with full re-synchronization, MultiView 4 lets you monitor any combination of SD, HD and Ultra HD video formats and frame rates all at the same time. Blackmagic MultiView 4 can output to both 1080 HD and 2160p Ultra HD displays so you connect it to either regular HD or Ultra HD televisions. If you connect an Ultra HD television or monitor, you can take advantage of the extra resolution of Ultra HD and see full resolution 1920 x 1080 HD in each view for incredible sharpness! You can even turn on audio meter overlays, custom labels and more in each view!

Connections

SDI Video Inputs

4 x 10-bit SD-SDI, HD-SDI and 6G-SDI.

SDI Video Outputs 4 loop, 1 HD/Ultra HD.

SDI Rates 270Mb, 1.5G, 3G, 6G.

SDI Video Multi View Outputs

1 x 10-bit HD-SDI and 10 bit 6G-SDI

Blackmagic MultiView 4

Mini Switches

and USB

<

000000

HDMI Video Multi View Outputs

1 x HDMI type A connector. Output supports EDID of the monitor.

SDI Reclocking

On all SDI outputs, auto switching between standard definition, high definition or 6G-SDI video.

Ŋ

Ŷ

Power

Connector

የ

Ethernet

Reference Input

Blackmagicdesig

66 501 0

None

Multi Rate Support

Auto detection of SD, HD or 6G-SDI. Simultaneous viewing of 4K, HD and SD video.

Updates

SD/HD/3G/6G-SDI Loop Out

Υ

Ŷ

SD/HD/3G/6G-SDI In

USB 2.0 high speed (480Mb/s) interface or via Ethernet.

Configuration

HD/UHD Out

Y

ç

HDMI

Out

RJ45 Ethernet or USB 2.0 for firmware updates and IP address setting.



Page 1 of 4



MultiView 4 Biodomagicales of B

\$495

Standards

SD Video Standards 525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50,1080p59.94, 1080p60, 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30, 1080i50, 1080i59.94, 1080i60

2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p, 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

4K Video Standards 4K DCI 24p

SDI Compliance SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 425M, SMPTE 425M-B, ITU-R BT.656 and ITU-R BT.601.

Audio Meters Each view, VU standard.

Source Routing None

SDI Video Sampling 4:2:2 and 4:4:4.

SDI Audio Sampling Television standard sample rate of 48kHz and 24-bit.

SDI Color Precision 10-bit 4:2:2 and 4:4:4.

SDI Color Space YUV or RGB for inputs, YUV for outputs.

SDI Auto Switching

Automatically selects between SD-SDI, HD-SDI, and 6G-SDI on each input so that each input can be running a different television standard.

SDI Metadata Support

Video payload identification ancillary data as per SMPTE 352M.

Control

Built in Control Panel

None. Supports Teranex Mini Smart Panel which adds menus and 2.2 inch color display. External Control Panel

Display

Optional Teranex Mini Smart Panel with 2.2 inch LCD for menu settings.

Software


Software Control

MultiView software included free for Windows™ and Mac™.

Internal Software Upgrade

Via included updater application.

Operating Systems

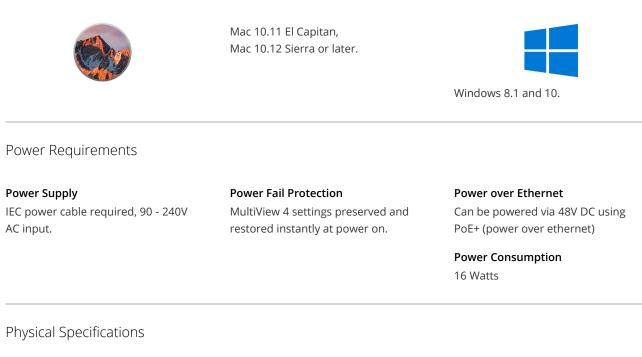



Environmental Specifications

Operating temperature	Storage temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 45° C (-4° to 113° F)	0% to 90% non-condensing

What's Included

Blackmagic MultiView 4 SD card with software and manual

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. <u>Privacy Policy</u>

Blackmagic Design Authorized Reseller