

SmartView Duo



Featuring two large independent 8 inch LCD screens in a compact rack mount design, SmartView Duo handles SD, HD and 3Gb/s SDI video standards. SmartView Duo is perfect for post production, broadcast and live event monitoring. For easy setup, all screens can be remotely adjusted via ethernet connection. With SmartView Duo you can install SDI monitoring everywhere you need!

\$495

Connections

SDI Video Input

Automatically switches between SD, HD and 3G-SDI. Reclocked loop through output.

Multi Rate Support

Auto detection of 2K, HD or standard definition inputs.

Updates and Configuration


Via USB 2.0 high speed (480 Mb/s)

Ethernet

10/100 BaseT with loop through.

Tally

9-pin D connector

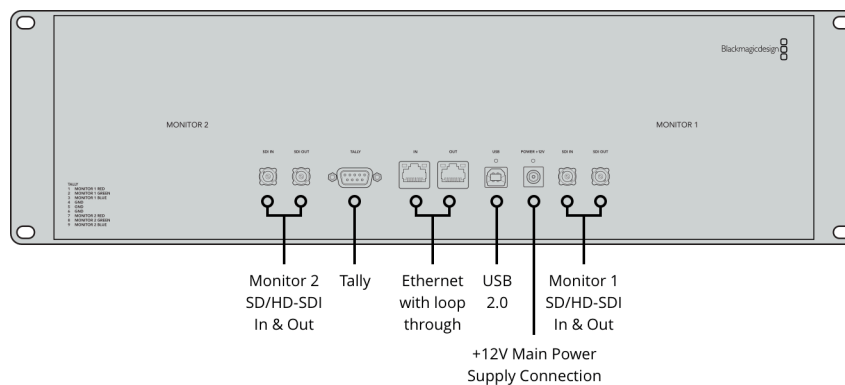

Standards

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 424M Level B and SMPTE 425M.

SDI Color Space

REC 601, REC 709

SDI Auto Switching

Automatically selects between SD, HD and 3 Gb/s SDI.

Video Sampling

4:2:2 and 4:4:4

SDI Format Support

525i59.94 NTSC, 625i50 PAL
720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97, 1080PsF30
1080i50, 1080i59.94, 1080i60

2K Format Support

2K DCI 23.98p, 2K DCI 24p, 2K DCI
25p
2K DCI 23.98PsF, 2K DCI 24PsF, 2K
DCI 25PsF

Software**Internal Software Upgrade**

Via included firmware updater
software.

SmartView Utility Software

Via USB or Ethernet.

Operating Systems

Mac 10.12 Sierra,
Mac 10.13 High Sierra or later.



Windows 8.1 and 10.

Display**Display Element**

TFT Active Matrix LCD.

Response

< 15 ms

Color Depth

16.7 Million Colors.

Display Resolution

800 x 480 pixels

Contrast Ratio

Typically 500:1

Display Orientation

Displays can rotate upside down for
optimum viewing angle.

Power Requirements**Power Supply**

12V universal power supply included
with international socket adapters for
all countries.

Power Consumption

< 20 Watts

Operational Voltage Range

12V - 15V

Physical Specifications



Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 45° C (-4° to 113° F)	0% to 90% non-condensing

What's Included

- SmartView Duo
- Power Supply
- SD card with software and manual

Warranty

12 Months Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller