


## DECKLINK SDI MICRO

Blackmagicdesign




Miniature M.2 card with 3G-SDI connections for simultaneous capture and playback in all SD and HD formats up to 1080p60. DeckLink SDI Micro also includes Black Burst and Tri-Sync reference input and its miniature size makes it great for use on portable solutions which are based on compact computers!

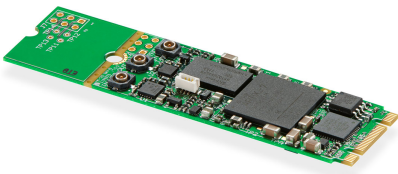


**Cena:**

**Kategorie:** [Video](#), [Produkcja](#), [Rejestratory Video](#), [Broadcast](#), [Rejestratory Video](#)

SDI Cable



## GALLERY IMAGES



## OPIS

### Connections

#### M.2

M.2 PCI Express 1 lane generation 3, compatible with B and M key type 2260 and 2280.

### Standards

#### SD Video Standards

525i59.94 NTSC, 625i50 PAL

#### HD Video Standards

720p50, 720p59.94, 720p60

1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30

1080i50, 1080i59.94, 1080i60

#### SDI Video Sampling

4:2:2, 4:4:4

#### SDI Color Precision

8, 10, 12-bit RGB 4:4:4 in all modes up to 1080p30 and 8, 10-bit YUV 4:2:2 in all modes.

#### SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, ITU-R BT.656 and ITU-R BT.601.

## Available Accessories

### Part Numbers

DeckLink SDI Micro, order code: BDLKMICROSDI

SDI Cable, order code: CABLE-BDLKMIR/SDI

## Physical Specifications

### Operating Systems

Windows 8.1 and 10, both 64-bit.

Linux

### Power Requirements

#### Power Consumption

4.03W (max)

## Environmental Specifications

### Operating Temperature

-25°C to 55°C (-13°F to 131°F)

### Storage Temperature

-40°C to 75°C (-40°F to 167°F)

### Relative Humidity

0% to 90% non-condensing



## **What's Included**

DeckLink SDI Micro

Fan and Heat Sink assembly

## **Warranty**

3 Year Limited Manufacturer's Warranty.