

# Smart Videohub CleanSwitch 12x12



Compact 6G-SDI router with built in re-synchronizers on all inputs allows clean switching between all video sources of the same video standard, and can be used as 12 re-synchronizers for automatic re-timing of SDI feeds. Smart Videohub CleanSwitch supports 12 inputs and 12 outputs in virtually all SD, HD and Ultra HD video formats. Supports multiple formats on the same router at the same time and will clean switch between multiple formats that match the reference frame rate when the switching is between the same video standard. Includes front panel button and spin knob routing, elegant machined metal front panel with LCD for routing display and video monitoring and remote Ethernet control.

\$1,495

### Connections

#### **SDI Video Inputs**

 $12 \times 10$ -bit SD-SDI, HD-SDI and 6G-SDI.

### **SDI Video Outputs**

12 x 10-bit SD-SDI, HD-SDI and 6G-SDI.

#### **SDI Rates**

270Mb, 1.5G, 3G, 6G.

## Video Input Re-Sync

On all 12 inputs for clean switch.

#### **SDI Reclocking**

On all SDI outputs.

## Reference Input

Tri-Sync or Black Burst.

## **Control Panel Connection**

Ethernet.

### **Serial Control Connection**

RJ-6 RS-422.

## Multi Rate Support

Auto detection of SD, HD or 6G-SDI. Simultaneous routing of 4K, HD and SD video.

#### Updates

USB

#### Front Panel Router Control


12 buttons for local control of Videohub. 6 buttons and scroll wheel for control of LCD display or RJ45 Ethernet.

### **Router Configuration**

Via front panel LCD or RJ45 Ethernet.

### **RS-422 Router Control**

1 x input for controlling router crosspoint switching.

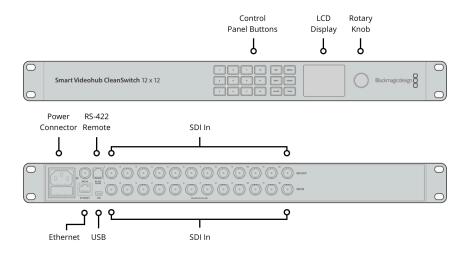

### Standards

#### **SD Video Standards**

525i59.94 NTSC, 625i50 PAL.

#### **HD Video Standards**

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

#### **2K Video Standards**

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

### **Ultra HD Video Standards**

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

### 4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p

## **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M Level A and B, ITU-R BT.656 and ITU-R BT.601.

## **SDI Video Sampling**

4:2:2 and 4:4:4

## **SDI Audio Sampling**

Television standard sample rate of 48kHz and 24 bit.

#### **SDI Color Precision**

10-bit 4:2:2 and 4:4:4

#### **SDI Color Space**

YUV or RGB.

# **SDI Auto Switching**

Automatically selects between SD-SDI, HD-SDI, and 6G-SDI on each input.

# SDI Metadata Support

Video payload identification ancillary data as per SMPTE 352M.

### Control

## **Built in Control Panel**

12 buttons for local control of Videohub with 6 buttons and scroll wheel for menu control. 2.2 inch color display.

## **External Control Panel**

Includes Blackmagic Videohub software control panel for Mac and Windows. Supports Blackmagic Smart Control and Blackmagic Master Control hardware panels. Includes Blackmagic Videohub SDK and Ethernet Videohub Control Protocol.

# Software

### **Software Control**

Router control included free for Windows<sup>m</sup> and Mac $^{m}$ .

# Internal Software Upgrade

Via included updater application.

# **Operating Systems**



Mac 10.14 Mojave, Mac 10.15 Catalina or later.



Windows 8.1 and 10.

# Display

Built in LCD for video and menu settings.

# Power Requirements


### **Power Fail Protection**

Router connections preserved and restored instantly at power on.

# **Power Supply**

IEC power cable required. 90 - 240V AC input.

# Physical Specifications

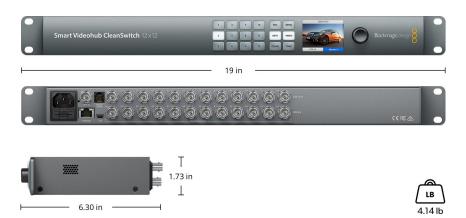

Physical Installation		
1 rack unit size. Less than 6 inches deep.		
Environmental Specifications		
Operating Temperature 0° to 40° C (32° to 104° F)	Storage Temperature -20° to 45° C (-4° to 113° F)	<b>Relative Humidity</b> 0% to 90% non-condensing
What's Included		
Smart Videohub CleanSwitch 12x12 SD card with software and manual		
Warranty		
3 Year Limited Manufacturer's Warra	anty, and 12 Month Warranty on the front	panel.
	s. This website uses remarketing services to advertise o	arks are property of their respective owners. MSRP includes on third party websites to previous visitors to our site. You can
Blackmagic Design Authoriz	ed Reseller	